



ΕΛΛΗΝΙΚΗ ΔΗΜΟΚΡΑΤΙΑ  
ΥΠΟΥΡΓΕΙΟ ΥΠΟΔΟΜΩΝ & ΜΕΤΑΦΟΡΩΝ  
ΓΕΝΙΚΗ ΔΙΕΥΘΥΝΣΗ ΜΕΤΑΦΟΡΩΝ  
ΔΙΕΥΘΥΝΣΗ ΟΔΙΚΩΝ ΕΜΠΟΡΕΥΜΑΤΙΚΩΝ  
ΜΕΤΑΦΟΡΩΝ  
ΤΜΗΜΑ ΔΙΕΘΝΩΝ ΟΔΙΚΩΝ ΕΜΠΟΡΕΥΜΑΤΙΚΩΝ  
ΜΕΤΑΦΟΡΩΝ

Αθήνα, 24 / 4 / 2019

Αρ. Πρωτ.: Φ448 / 31766 / 1827

Ταχ. Διεύθυνση : Αναστάσεως 2 & Τσιγάντε

101 91 Παπάγου

Πληροφορίες : Α. Ντούρας

Τηλέφωνο : 210 6508510

Fax : 210 6508491

ΠΡΟΣ: 1)Ο.Φ.Α.Ε.

Πατησίων 351

11144, Αθήνα

2)ΠΣΧΕΜ

Πειραιώς 4

10431, Αθήνα

**ΘΕΜΑ:** Τεχνικές προδιαγραφές μέγιστων διαστάσεων και βαρών ορισμένων κατηγοριών οχημάτων που θα ισχύσουν στην Γεωργία από 1<sup>η</sup> Ιουνίου 2019.


**Σχετ.:** Η υπ. αριθμ. BS/INFO.2019.0183 ρηματική διακοίνωση του ΟΣΕΠ

Σε συνέχεια του ανωτέρω σχετικού, το οποίο επισυνάπτεται, σας γνωρίζουμε πως από 1<sup>η</sup> Ιουνίου 2019 θα τεθούν σε ισχύ στην Γεωργία διατάξεις αναφορικά με τις τεχνικές προδιαγραφές μέγιστων διαστάσεων και βαρών ορισμένων κατηγοριών οχημάτων.

Παρακαλούμε για την ενημέρωση των μελών σας.

Η Διευθύντρια

Α. Γκουρβέλου

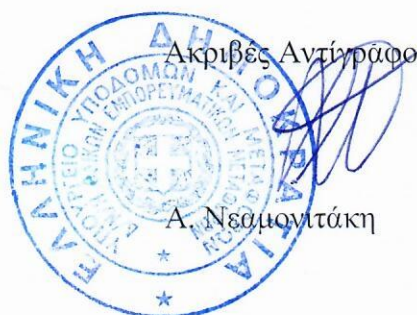

ΟΜΟΣΠΟΝΔΙΑ ΦΟΡΤΗΓΩΝ  
ΑΥΤΟΚΙΝΗΤΙΣΤΩΝ ΕΛΛΑΔΟΣ  
ΕΛΗΦΘΗ ΤΗ ..... 8/5/19  
ΑΡΙΘΜ. ΠΡΩΤ. .... Α6/0477

**Συν:** Εννέα (9) φύλλα

**Εσωτερική Διανομή:**

-Διεύθυνση Οδικών Εμπορευματικών Μεταφορών - Τμήμα Διεθνών Οδικών Εμπορευματικών Μεταφορών (3)



**ORGANIZATION OF THE BLACK SEA ECONOMIC COOPERATION**  
**Permanent International Secretariat**

---

---

**BS/INFO.2019.0183**

The Permanent International Secretariat (PERMIS) of the Organization of the Black Sea Economic Cooperation (BSEC) presents its compliments to the Ministries of Foreign Affairs of the BSEC Member States and, has the honor to circulate, enclosed herewith, the Note of the Consulate General of Georgia in Istanbul, No.: 74433, dated 11 April 2019, forwarding information on the technical regulations on the maximum authorized dimensions and maximum authorized weight for certain categories of motor vehicles, which will come into force in Georgia as of 1 June 2019.

The Permanent International Secretariat of the Organization of the Black Sea Economic Cooperation avails itself of this opportunity to renew to the Ministries of Foreign Affairs of the BSEC Member States the assurances of its highest consideration.



Istanbul, 12 April 2019

Encl.: As above.

**Ministries of Foreign Affairs of the BSEC Member States**

MAXIMUM WEIGHTS AND DIMENSIONS AND RELATED CHARACTERISTICS OF VEHICLES

1. Maximum authorized dimensions for the vehicles

1.1. Maximum length:

- motor vehicle (except bus)	12,00 m
- trailer	12,00 m
- articulated vehicle	16,50 m
- road train	18,75 m
- specialized road train	20,00 m
- articulated bus	18,75 m
- bus with two axles	13,50 m
- bus with more than two axles	15,00 m
- bus + trailer	18,75 m

1.2. Maximum width:

(a) all vehicles	2,55 m
(b) superstructures of conditioned vehicles	2,60 m

1.3. Maximum height (any vehicle)

In case of car carrier or carriage of container	4,30 m
---	--------

1.4. Removable superstructures and standardized freight items such as containers are included in the dimensions specified in points 1.1, 1.2, 1.3, 1.6, 1.7, 1.8 and 4.4.

1.4a If any removable attachments such as ski-boxes are fitted to a bus, its length, including the attachments, must not exceed the maximum length laid down in point 1.1

1.5. Any motor vehicle or vehicle combination which is in motion must be able to turn within a swept circle having an outer radius of

12,50 m and an inner radius of 5,30 m.

1.5.a

Additional requirements for buses

With the vehicle stationary, a vertical plane tangential to the side of the vehicle and facing outwards from the circle shall be established by marking a line on the ground. In the case of an articulated vehicle, the two rigid portions shall be aligned with the plane.

When the vehicle moves from a straight line approach into the circular area described in point 1.5, no part of it shall move outside of that vertical plane by more than 0,60 m

1.6. Maximum distance between the axis of the fifth-wheel king pin and the rear of a semi-trailer 12,00 m

1.7. Maximum distance measured parallel to the longitudinal axis of the road train from the foremost external point of the loading area behind the cabin to the rearmost external point of the trailer of the combination, minus the distance between the rear of the drawing vehicle and the front of the trailer 15,65 m

1.8. Maximum distance measured parallel to the longitudinal axis of the road train from the foremost external point of the loading area behind the cabin to the rearmost external point of the trailer of the combination 16,40 m

2. Maximum authorized vehicle weight (in tonnes)

2.1. Vehicles forming part of a vehicle combination



2.1.1. Two-axle trailer	18 tonnes
2.1.2. Three-axle trailer	24 tonnes
2.2. Vehicle combinations	
2.2.1. Road trains with five or six axles	
(a) two-axle motor vehicle with three-axle trailer	40 tonnes
(b) three-axle motor vehicle with two or three-axle trailer	40 tonnes
2.2.2. Articulated vehicles with five or six axles	
(a) two-axle motor vehicle with three-axle semi-trailer	40 tonnes
(b) three-axle motor vehicle with two or three-axle semi-trailer	40 tonnes
(c) two-axle motor vehicle with three-axle semi-trailer carrying, in intermodal transport operations, one or more containers or swap bodies, up to a total maximum length of 45 feet:	42 tonnes
(d) three-axle motor vehicle with two- or three-axle semi-trailer carrying, in intermodal transport operations, one or more containers or swap bodies, up to a total maximum length of 45 feet	44 tonnes
2.2.3. Road trains with four axles consisting of a two-axle motor vehicle and a two-axle trailer	36 tonnes
2.2.4. Articulated vehicles with four axles consisting of a two-axle motor vehicle and a two-axle semi-trailer, if the distance between the axles of the semi-trailer:	
2.2.4.1. is 1,3 m or greater but not more than 1,8 m	36 tonnes

2.2.4.2. is greater than 1,8m

36 tonnes

+ 2 tonnes margin when the maximum authorized weight (MAW) of the motor vehicle (18 tonnes) and the MAW of the tandem axle of the semi-trailer (20 tonnes) are respected and the driving axle is fitted with twin tyres and air suspension or suspension recognized as being equivalent within the Community as defined in

### 2.3. Motor vehicles

2.3.1. Two-axle motor vehicles

18 tonnes

2.3.2. Three-axle motor vehicles

— 25 tonnes

— 26 tonnes

where the driving axle is fitted with twin tyres and air suspension or suspension recognized as being equivalent within the Community as defined in Annex II, or where each driving axle is fitted with twin tyres and the maximum weight of each axle does not exceed 9,5 tonnes.

2.3.3. Four-axle motor vehicles with two steering axles

— 32 tonnes

where the driving axle is fitted with twin tyres and air suspension or suspension recognized as

being equivalent within the Community as defined in Annex II, or where each driving axle is fitted with twin tyres and the maximum weight of each axle does not exceed 9,5 tonnes.

2.4. Three-axle articulated buses	28 tonnes
3. Maximum authorized axle weight of the vehicles referred to in Article 1 (1) (b) ( in tonnes)	
3.1. Single axles	
Single non-driving axle	10 tonnes
3.2. Tandem axles of trailers and semi-trailers	
The sum of the axle weights per tandem axle must not exceed, if the distance (d) between the axles is:	
3.2.1. less than 1 m ( $d < 1,0$ )	11 tonnes
3.2.2. between 1,0 m and less than 1,3 m ( $1,0 \leq d < 1,3$ )	16 tonnes
3.2.3. between 1,3 m and less than 1,8 m ( $1,3 \leq d < 1,8$ )	18 tonnes
3.2.4. 1,8 m or more ( $1,8 \leq d$ )	20 tonnes
3.3. Tri-axles of trailers and semi-trailers	
The sum of the axle weights per tri-axle must not exceed, if the distance (d) between the axles is:	
3.3.1. 1,3 m or less ( $d \leq 1,3$ )	21 tonnes
3.3.2. over 1,3 m and up to 1,4 m ( $1,3 < d \leq 1,4$ )	24 tonnes

### 3.4. Driving axle

3.4.1. Driving axle of the vehicles referred to in 2.2.1 and 2.2.2

11,5 tonnes

3.4.2. Driving axle of the vehicles referred to in points 2.2.3, 2.2.4, 2.3 and 2.4

11,5 tonnes

### 3.5. Tandem axles of motor vehicles

The sum of the axle weights per tandem axle must not exceed, if the distance (d) between the axles is:

3.5.1. less than 1 m ( $d < 1,0$ )

11,5 tonnes

3.5.2. 1,0 m or greater but less than 1,3 m ( $1,0 \leq d < 1,3$ )

16 tonnes

3.5.3. 1,3 m or greater but less than 1,8 m ( $1,3 \leq d < 1,8$ )

— 18 tonnes

— 19 tonnes

where the driving axle is fitted with twin tyres and air suspension or suspension recognized as being equivalent within the Community as defined in Annex II, or where each driving axle is fitted with twin tyres and where the maximum weight for each axle does not exceed 9,5 tonnes

## 4. Related characteristics of the vehicles

4.1. All vehicles



The weight borne by the driving axle or driving axles of a vehicle or vehicle combination must not be less than 25 % of the total laden weight of the vehicle or vehicle combination, when used in international traffic

#### 4.2. Road trains

The distance between the rear axle of a motor vehicle and the front axle of a trailer must not be less than 3,00 m.

#### 4.3. Maximum authorized weight depending on the wheelbase

The maximum authorized weight in tonnes of a four-axle motor vehicle may not exceed five times the distance in metres between the axes of the foremost and rearmost axles of the vehicle

#### 4.4. Semi-trailers

The distance measured horizontally between the axis of the fifth-wheel king pin and any point at the front of the semi-trailer must not exceed 2,04 m